
### **GUTEX Wood Fibre** cut quickly and efficiently.

Festool and GUTEX, two leading premium brands, have joined forces to show you just how easy and efficient cutting insulation to size is.

Through thick and thin, no matter which GUTEX insulation or insulation thickness you're installing, Festool offers the ideal solution for your specific cutting needs.

See for yourself.

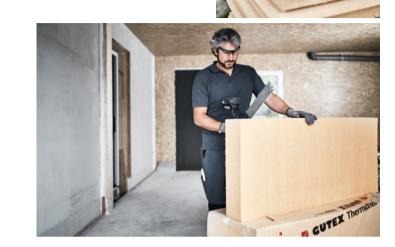

Material		Recommended	
<b>☑ GUTEX</b> Multiplex-top®	<b>☑ GUTEX</b> Thermowall*	HK 85 hand circular saw  - FS quide rail or	
<b>☑ GUTEX</b> Ultratherm®	<b>☑ GUTEX</b> Thermowall*-gf	FSK 670 mitre guide rail	Chillian Chillian
<b>☑ GUTEX</b> Multitherm*	<b>☑ GUTEX</b> Thermoroom®	CTM 36 E extractor	
<b>☑ GUTEX</b> Thermosafe-wd	<sup>®</sup> <b>☑ GUTEX</b> Thermoinstal <sup>®</sup>		

#### **RIGID INSULATION 85 MM OR GREATER**

Material	Recommended
✓ GUTEX Ultratherm® ✓ GUTEX Thermowall®	IS reciprocating saw up to 330 mm
<b>☑ GUTEX</b> Multitherm* <b>☑ GUTEX</b> Thermowall*-L	FS guide rail CTM 36 E portable dust extractor
<b>☑ GUTEX</b> Thermoroom <sup>®</sup> <b>☑ GUTEX</b> Thermoflat <sup>®</sup>	CT-VA-20 pre-separator
<b>☑ GUTEX</b> Thermosafe-wd* <b>☑ GUTEX</b> Pyroresist* wall	
<b>☑ GUTEX</b> Thermosafe-homogen°	(T = 1)

### FLEXIBLE INSULATION UP TO 240 mm

Material	Recommended	
<b>☑ GUTEX</b> Thermoflex®	ISC cordless insulation saw	

### Multitalented with depth.







## Uncompromising performance.

Direct, practical and comprehensive service for you and your tools! Besides excellent tools, we deliver superior service quality. We're prepared to do everything to assure your satisfaction and confidence in Festool. Only then are we satisfied. Learn more at festool.de/service

Festool GmbH Wertstraße 20 Festool Deutschland GmbH D-73240 Wendlinger

Festool

CANNIS GROUP COMPLET s.r.o. itvínovice 119 | 370 01 České Budějovice, CZECH REPUBLIC Phone: + 420 602 759 917| www.gutexcz.com | info@gutexcz.cor

www.festool.de

Insualtion Cutting Leaflet Valid as of 01.11.2019

has never been easier.

The system GUTEX uses and recommends for fitting wood fibre insulation.

Discover further information at www.gutexcz.com



Festool reserves the right to change the information contained herein and shall not be held liable for any damages resulting from error or misprinting. All illustrations, figures, graphics and images are non binding. Produced for Festool GmbH, 73240 Wendlingen, Germany, 08/2019

**Cutting insulation** 

## Revolutionize your insulation work.

With the ISC 240 cordless insulation saw, you save energy and time, while reducing fatigue and the need to rework cuts, thanks to the tool's ergonomic, lightweight design and superb handiness in any position. Add the cleverly mated attachments and you have the means to cut flexible insulation guickly and precisely – even when it's as thick as 240 mm.

Enjoy the benefits provided by the powerful motor and longlasting battery, including quicker installation even when changing worksites. And profit from carefully designed system accessories like guide rail and angle cut stops that give you exceptional fitting precision with little fuss.

ISC 240 is your answer for more efficient insulation installation.



TECHNICAL INFORMATION			
Battery	18 V	Extractor fitting diameter	27 mm
Strokes	3,000 min-1	Battery capacity Plus/ Compact variant	5.2 Ah / 3.1 Ah
Cut depth	240 mm	Weight with Li-Ion Plus/ Compact variant	2.5 kg / 2.3 kg
Stroke length	26 mm		

SERRATED BLADE	

**■ GUTEX** FLEXIBLE GUTEX INSULATION UP TO 240 mm





#### CLEANTEC CTM 36 offers a lot of collector volume and very compact dimensions. Nothing remains, just clean air.

- > Smooth vacuum hose and optimum SYS-Dock with electrical chord accommodation and T-LOC for the convenient attachment of SYSTAINER to the extractor
- > Consistent, high suction thanks to high-power turbine
- > Anti-static design features prevent static build-up during operation
- > Secure attachment of Systainers via SYS-Dock
- > Hose and electrical chord accommodations keep jobsites tidy and safe
- > Economical use of available volume with SELFCLEAN filter bag
- > Collector / filter bag volume 36/34 l
- > Dust class M compliant

# The go-to expert

for rigid insulation cutting.

IS 330 provides you with the advantages of both chain and circular saws with unique cordless portability and 330-mm cutting depth. Rigid insulation cuts easily, fast and precise, thanks to the system guide rail. You can use IS 330 anywhere, even where space is tight, such as on scaffolding.

With demand for greater insulation thickness steadily increasing, your investment in an IS 330 is a very wise move.

IS 330 is your go-to specialist when it comes to rigid insulation.



TECHNICAL INFORMATION			
No load speed	4,600 min <sup>-1</sup>	Cut depth 0°; 90°/45°/60°	330/230/165 mm
Input wattage	1,600 W	Mitre/bevel range	0 - 60 °
Guide bar adjustment	0 - 10 °	Weight	7 kg
Cut speed (no load)	12.00 m/s		

#### ISO SAW CHAIN

**☑ GUTEX** RIGID INSULATION > 85 mm



















Thermowall® Thermowall®-L Thermoflat® Pyroresist®wall



### The new CT pre-separator CT-VA-20 manages large volumes of dust. Efficiently, conveniently and dependably.

- > High-capacity management of high dust volume, thanks to cyclone technology. Compatible with the Festool CT portable extractor, this pre-separator captures up to 95% of dust before it reaches the portable extractor.
- > Suitable for use with all Festool CT 26/36/48 extractors with or without AC (auto clean)
- > Consistent level of suction since filter is less prone to accumulation
- > Convenient and secure transport due to stackable, compact, solidly-built collector construction
- > Dust class M compliant

## Jack of all trades. The tough HK 85.

Have more freedom without sacrificing precision. Boost your efficiency and enjoy the luxury of increased user ease, agility and optimum ergonomics. That's what the HK 85 circular saw, in combination with the FSK 670 mitre guide rail, delivers.

Integrated features such as cut depth adjustment with plunge come with the saw. And with the groove cutter attachment, you can easily modify the handsaw to cut grooves and rabbets. Learn more now!

HK 85 does it all dependably and precisely when it comes to sheet stock.



TECHNICAL INFORMATION				
No load speed	1,500 - 3,300 min <sup>-1</sup>	Cut depth 0°; 90°	0 - 85 mm	
Input wattage	2,300 W	Cut depth 45°; 60°	62/47 mm	
Blade diameter	230 mm	Extractor fitting diameter	27/36 mm	
Angle range	0 - 60 °	Weight	7 kg	

#### STANDARD SAW BLADE

**☑ GUTEX** RIGID INSULATION < 85 mm

















For further information about model variants and what comes with products, visit www.festool.de

#### The dream team when it comes to dust-free jobsites: Bluetooth® module, battery pack and remote control.

- > Bluetooth® module starts extractor unit via remote control or Bluetooth®
- > Bluetooth® battery packs communicate with Bluetooth® module on extractor unit. Cordless tool and extractor start simultaneously.
- > Bluetooth® remote control allows on and off switching of extractor from hose

#### Learn more at festool.de/staubfrei

Bluetooth® wordmark and logo are registered brand names of Bluetooth SIG, Inc. and are used under license by TTS Tooltechnic Systems AG & Co. KG, and subsequently Festool.

